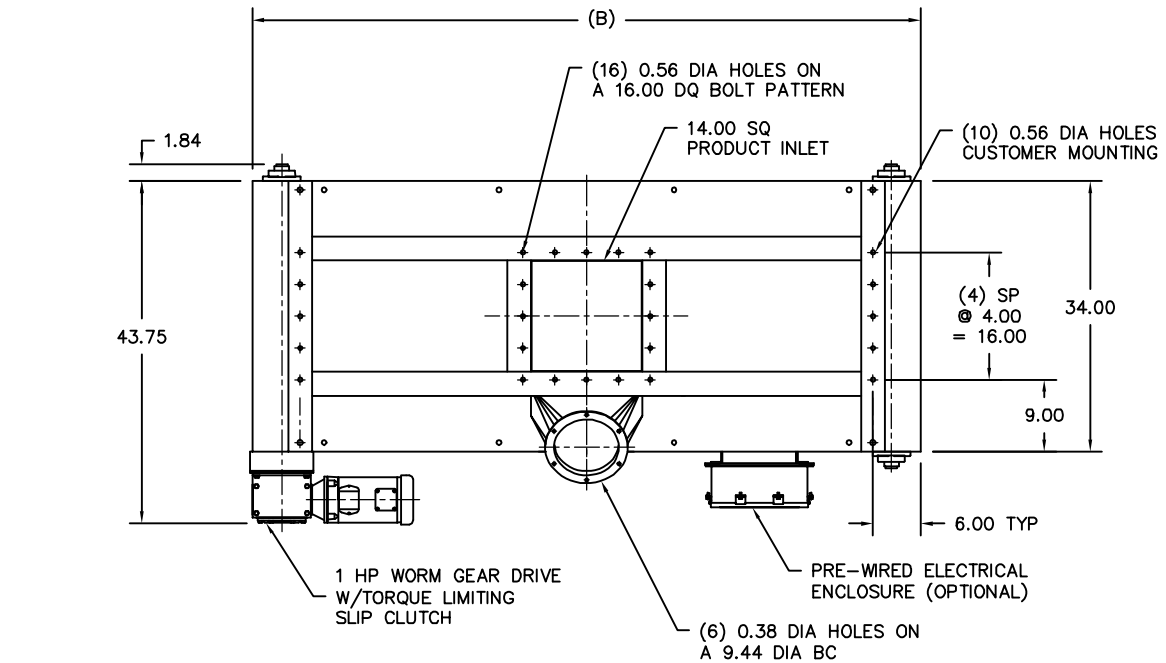

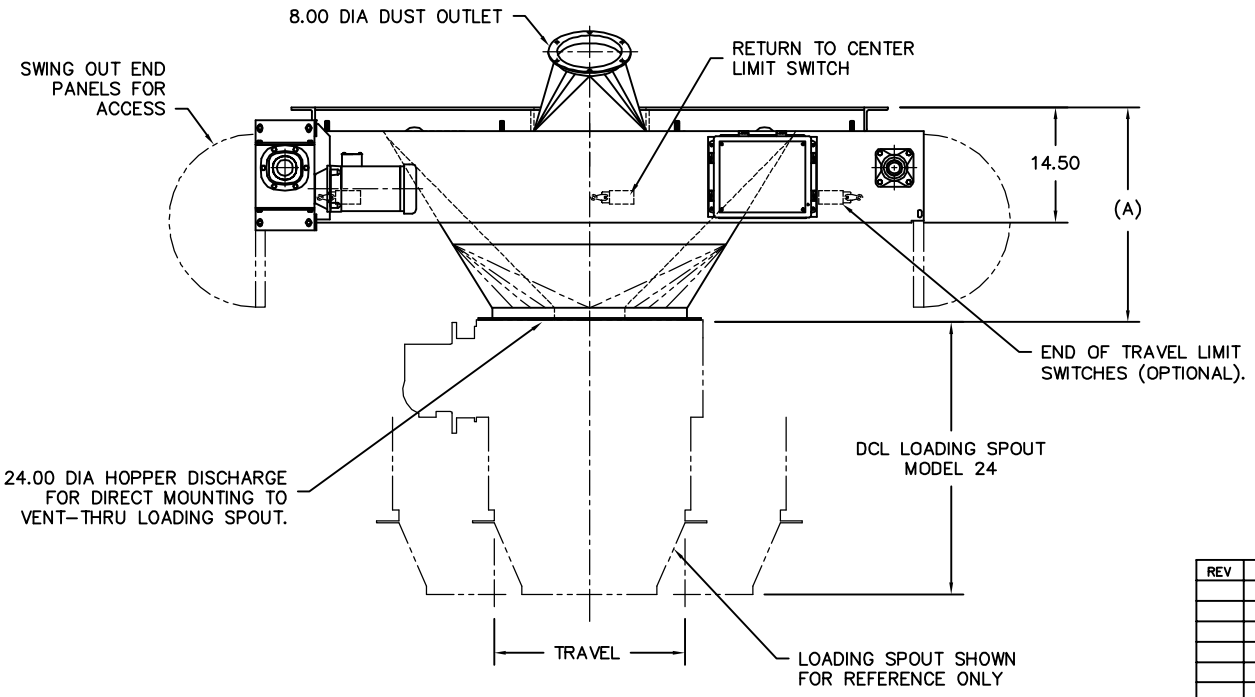

MODEL	TRAVEL	A	B	EST WGT
HPS24-2	24.00	27.00	84.00	958 LB*
HPS24-4	48.00	39.00	132.00	1360 LB*
HPD24-6	72.00	54.00	180.00	1790 LB*

GENERAL NOTES:

POSITIONING SPEED: APPOX 5 IN/SEC

HOPPER CONSTRUCTION IS 11 GA MILD STEEL. STAINLESS STEEL CONSTRUCTION AND AR STEEL IS OPTIONAL.

ALL INDUSTRIAL VOLTAGES ARE AVAILABLE FOR ELECTRICAL COMPONENTS.

PREWIRING OF ELECTRICAL COMPONENTS TO SPOUT FRAME JUNCTION BOX OPTIONAL.

ELECTRICAL ENCLOSURES NEMA 4 STANDARD. NEMA 4X, 7, AND 9 OPTIONAL.

METAL SURFACES ARE POWER TOOL CLEANED, PRIMED, AND FINISHED WITH INDUSTRIAL ENAMEL.

SPECIFICATIONS AND/OR DIMENSIONAL DATA ARE SUBJECT TO CHANGE. CONSULT DCL FOR CERTIFIED DRAWINGS.

OPTIONS:

END OF TRAVEL LIMIT SWITCHES

PRE-WIRED ELECTRICAL ENCLOSURE

*ESTIMATED WEIGHTS DO NOT INCLUDE OPTIONAL EQUIPMENT OR ELECTRICAL COMPONENTS.

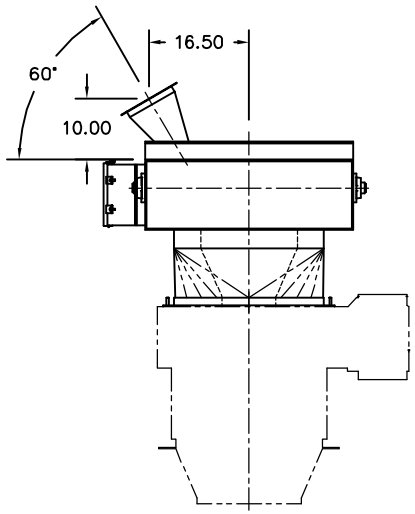

REV	DATE	BY

DCL
SPECIALISTS IN ADVANCED DESIGN LOADING SYSTEMS

P.O. BOX 125
CHARLEVOIX, MICHIGAN 49720
(231) 547-5600

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONAL: 1/16" DECIMAL: .06 ANGULAR 1/2

DRAWN BY: BLG
CHECKED BY: ENG
SCALE: NONE
DATE: 06/28/02

TITLE: HPS24 SINGLE DIRECTION POSITIONER (VENT)

DRAWING No: HPS-10002