
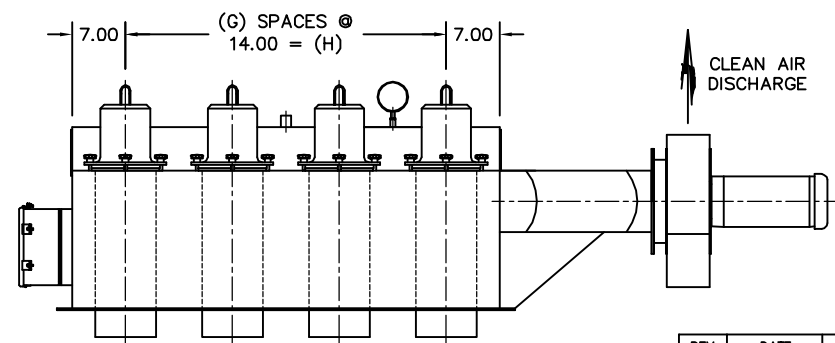
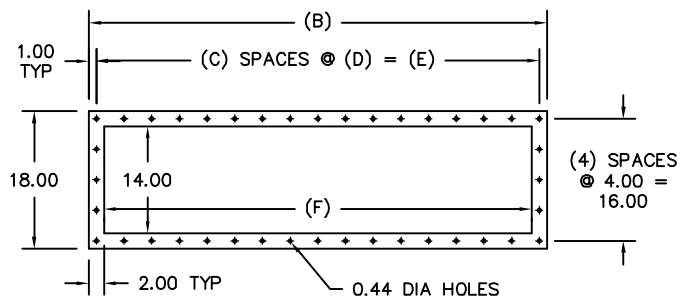


| MODEL | EST WGT | # FILTER | CLOTH AREA | FILTER LGTH | A | B | C | D | E | F | G | H |
|--------|----------|----------|------------|-------------|--------|--------|----|------|--------|--------|---|-------|
| VML95 | 220 LB* | 2 | 95 SQ FT | 22.00 | 28.00 | 32.00 | 8 | 3.75 | 30.00 | 28.00 | 1 | 14.00 |
| VML140 | 353 LB* | 3 | 140 SQ FT | 22.00 | 42.00 | 46.00 | 11 | 4.00 | 44.00 | 42.00 | 2 | 28.00 |
| VML185 | 485 LB* | 4 | 185 SQ FT | 22.00 | 56.00 | 60.00 | 16 | 3.63 | 58.00 | 56.00 | 3 | 42.00 |
| VML235 | 618 LB* | 5 | 235 SQ FT | 22.00 | 70.00 | 74.00 | 18 | 4.00 | 72.00 | 70.00 | 4 | 56.00 |
| VML280 | 750 LB* | 6 | 280 SQ FT | 22.00 | 84.00 | 88.00 | 16 | 5.38 | 86.00 | 84.00 | 5 | 70.00 |
| VML330 | 883 LB* | 7 | 330 SQ FT | 22.00 | 98.00 | 102.00 | 25 | 4.00 | 100.00 | 98.00 | 6 | 84.00 |
| VML375 | 1015 LB* | 8 | 375 SQ FT | 22.00 | 112.00 | 116.00 | 24 | 4.75 | 114.00 | 112.00 | 7 | 98.00 |

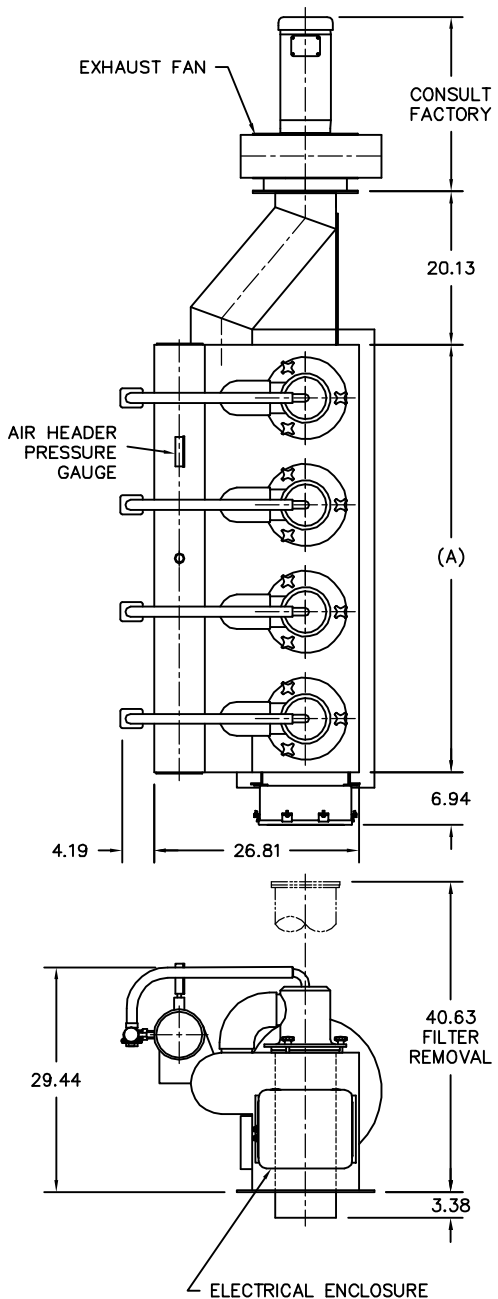

GENERAL NOTES:

ALL INDUSTRIAL VOLTAGES AVAILABLE FOR ELECTRICAL COMPONENTS.

PREWIRING OF ELECTRICAL COMPONENTS TO VMV HOUSING JUNCTION BOX OPTIONAL.

ELECTRICAL ENCLOSURES NEMA 4 STANDARD. NEMA 4X, 7, AND 9 OPTIONAL.

METAL SURFACES ARE POWER TOOL CLEANED, PRIMED, AND FINISHED WITH INDUSTRIAL ENAMEL.

AIR REQUIREMENTS FOR COMPRESSED AIR HEADER ARE (16) CFM @ (80-100) PSI.

SPECIFICATIONS AND/OR DIMENSIONAL DATA ARE SUBJECT TO CHANGE. CONSULT DCL FOR CERTIFIED DRAWINGS.

*ESTIMATED WEIGHTS DO NOT INCLUDE OPTIONAL EQUIPMENT, ELECTRICAL COMPONENTS OR EXHAUST FAN.

| REV | DATE | BY | DCL | | SPECIALISTS IN ADVANCED DESIGN LOADING SYSTEMS | | P.O. BOX 125 CHARLEVOIX, MICHIGAN 49720 (231) 547-5600 | |
|-----|----------|-----|-------|--|---|--|--|----------------|
| | | | | | TOLERANCES UNLESS OTHERWISE SPECIFIED FRACTIONAL: 1/16" DECIMAL: .06 ANGULAR: 1/2 | | DRAWN BY: JNM | SCALE: NONE |
| | | | | | | | CHECKED BY: ENG | DATE: 10-04-03 |
| A | 07-22-02 | JNM | TITLE | | VML VENTILATION MODULE | | DRAWING No: VML-10001 | |